

Norton CST™

Application Guide

1. Figure about 90 percent of the square footage of your floor area for the amount of lineal feet of Norton CST™ that is required. Choose correct width to cover the entire top of the joist. Rolls are 100 lineal feet long. Standard widths are: 1-7/16", 2-1/4", 3" (other widths available).
2. Place the core of the roll onto the hub midway on the applicator so that the sticky side of the gasket faces forward as the gasket feeds over the spool on the end. Do not peel off top of gasket as the smooth surface helps ease placement of subfloor panels.
3. Before applying the gasket, be sure that all surfaces are free from dirt, ice, and water.
4. Roll Norton CST™ on the entire length of each joist and all rim board pieces at the stack prior to installation. This is the easiest, fastest, and safest method.
5. Cut joists and rim board to proper length after Norton CST™ is applied.
6. If joists are damp, wipe clean of ice, water, dust, and debris. Staple gasket to joist at 12" intervals to allow drying in place.
7. When a roll of Norton CST™ is used up, remove it from the applicator. Add a new roll and continue from the point of last coverage.
8. Install floor sheathing panels with the recommended gap to allow for normal expansion and contraction.
9. Ring shank nails or screws, per project specifications and/or code requirements, must be used with the gasket for subfloor attachment. Fasten 6" o.c. along panel edges and 12" o.c. in field. Observe all normal safety precautions associated with floor framing and sheathing.
WARNING: Gasket is slippery and caution should be used whenever walking on joists or applying subfloor panels.

Note: Glue is not used with Norton CST™.
Design must be based on nail-only method of construction.

For questions about installation call 1-800-724-0883 or visit www.nortoncst.com


NORTON CST™ is a trademark

Limited Warranty: For a period of 6 months from the date of first sale, Saint-Gobain Performance Plastics Corporation warrants this product(s) to be free from defects in manufacturing. Our only obligation will be to provide replacement product for any portion proving defective, or at our option, to refund the purchase price thereof. User assumes all other risks, if any, including the risk of injury, loss or damage, whether direct or consequential, arising out of the use, misuse, or inability to use this product(s). SAINT-GOBAIN PERFORMANCE PLASTICS DISCLAIMS ANY AND ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.


NOTE: Saint-Gobain Performance Plastics Corporation does not assume any responsibility or liability for any advice furnished by it, or for the performance or results of any installation or use of the product(s) or of any final product into which the product(s) may be incorporated by the purchaser and/or user. The purchaser and/or user should perform its own tests to determine the suitability and fitness of the product(s) for the particular purpose desired in any given situation.



Place core of roll onto hub

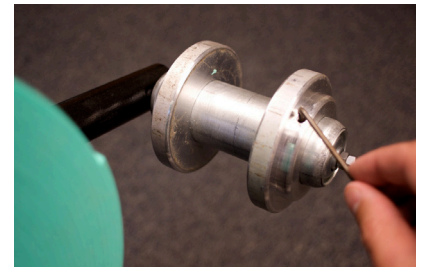

Adjust applicator with 1/8" Allen wrench to fit joist flanges

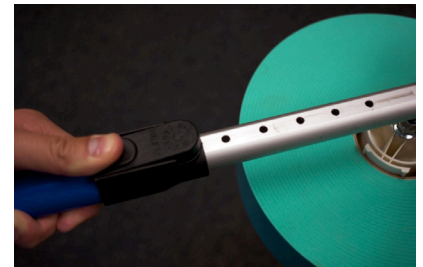

Adjust handle length as needed



Apply tape

Saint-Gobain Performance Plastics

One Sealants Park
Granville, NY 12832
1-800-724-0883
(518)642-2200
Fax (518)642-2793

08/2009

