


Norseal[®] V820

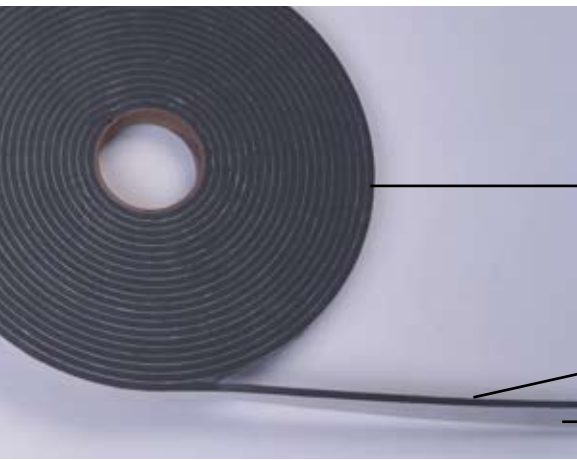

Black low density foam

High performance acrylic adhesive on one side

Easy-release paper liner

Closed-Cell PVC Foam Sealant with Pressure-Sensitive Adhesive on One Side

Features & Benefits

- Dimensionally stable under compression
- Withstands a wide temperature range
- Low deflection force causes no distortion of thin-gauge plastics and metals
- Easy to radius, enhancing positive seal on curved surfaces
- Very conformable, adapts easily to irregular surfaces

Typical Applications

- Light and dust seals
- Suspended ceilings
- Refrigeration
- Wall systems
- Environmentally controlled rooms
- Electronic equipment cabinets
- Toolbox lid seal
- Anti-squeak seal

Engineered for easy compression

NORSEAL[®] V820 is a very soft, low density foam that has been engineered for easy compression. Since it can withstand a wide range of temperatures, it can be used in all climates. NORSEAL[®] is dimensionally stable under compression ; it will not dip, ooze or shift. In addition, NORSEAL[®] adapts easily to irregular surfaces. It is easy to radius, enhancing positive seals on curved surfaces. NORSEAL[®] can be used anywhere a soft, conformable foam product is required.

Superior performance in a low-density foam

NORSEAL's special formulation allows it to provide superior performance at a reduced force to compress. Its low deflection force causes no distortion of thin-gauge plastics and metals. NORSEAL's low thermal conductivity improves energy efficiency. And, NORSEAL[®] controls sound transmission and vibration, which makes it ideal for acoustical attenuation.

Aggressive adhesive simplifies installation

NORSEAL's aggressive adhesive allows for easy installation. An easy-release paper liner eliminates stretch during installation. And, a high-performance acrylic adhesive on one side speeds installation. NORSEAL's high-tack positioning adhesive grips tightly on initial contact, which ensures that the foam stays in place during assembly.

Standard roll sizes

NORSEAL[®] is available in black in widths of 1/4" to 56", lengths from 25' to 100' and a variety of thicknesses. For configuration capabilities, please contact your sales representative.

Standard roll sizes

*Width : 1/4" to 56"	Color : Black *Varies with gauge	3" ID Cores
Product no.	Thickness, in.	Length, in.
V824	1/8	100
V826	3/16	50
V828	1/4	50
V8212	3/8	25
V8216	1/2	25

Storage: Material should be stored at 70°F, 50% relative humidity.

Application guide : Surfaces should be clean before applying. Do not remove liner until sealant is in proper position. Avoid touching adhesive surface before application. Saint-Gobain recommends testing all sealants under individual application conditions and materials used prior to commercial use.

Please note : Because Saint-Gobain cannot anticipate or control every potential application, we strongly recommend testing of this product under individual application conditions prior to commercial use. The product contains plasticizer, which may adversely affect some plastics.

Typical Physical Properties

Property	Test Method	Value or Rating
Density: lbs/cu (kg/m ³)	ASTM D-1667	6.0 (96.1)
Hardness: Shore OO	ASTM D-2240	10
Force to compress: psi (kPa)	ASTM D-1667	1.7 (11.7)
Compression Deflection: psi (kPa)	ASTM D-1667	0.5 (3.4)
Compression set: % lost fr.orig.ht*	NTP-37	4.0
Water absorption: % by volume*	NTP-35	5.0
90°Peel adhesion: oz/in (N/m)	PSTC-2	64 (700)
Elongation: %	ASTM D-412 die A	125
Tensile: psi (kPa)	ASTM D-412 die A	13.7 (94)
Thermal conductivity : BTU (in) Sq. Ft. (hr) °F)	ASTM C-518	.27
Recommended service temp.	-	-30°F to 180°F (-34°C to 82°C)
Recommended application temp.	-	40°F to 125°F (4°C to 52°C)

* Based on 30% compression

NTP = Norton Test Procedure

Parameter values are not guaranteed and will differ from lot to lot.

For specification writing, contact Saint-Gobain's technical service.

NORSEAL® is a registered trademark.



Saint-Gobain Performance Plastics

One Sealants Park
Granville, NY 12832
1-800-724-0883
(518)642-2200
Fax (518)642-2793

Distributed By:

Limited Warranty: For a period of 6 months from the date of first sale, Saint-Gobain Performance Plastics Corporation warrants this product(s) to be free from defects in manufacturing. Our only obligation will be to provide replacement product for any portion proving defective, or at our option, to refund the purchase price thereof. User assumes all other risks, if any, including the risk of injury, loss or damage, whether direct or consequential, arising out of the use, misuse, or inability to use this product(s). SAINT-GOBAIN PERFORMANCE PLASTICS DISCLAIMS ANY AND ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.



NOTE: Saint-Gobain Performance Plastics Corporation does not assume any responsibility or liability for any advice furnished by it, or for the performance or results of any installation or use of the product(s) or of any final product into which the product(s) may be incorporated by the purchaser and/or user. The purchaser and/or user should perform its own tests to determine the suitability and fitness of the product(s) for the particular purpose desired in any given situation.