

V2800 SERIES

Black, Closed-Cell, Polyurethane Foam Tape



FOAM Sealant

ISO 9001:2015 CERTIFIED

Norbond® V2800 series bonding tapes combine a black polyurethane foam substrate with a high-performance, pressure-sensitive acrylic adhesive on both sides. The foam substrate allows energy and stress in the joint to be dissipated over the entire bond. **Norbond** V2800 is an ideal choice for severe exterior bonding applications. The product is durable in all weather conditions and provides resistance against UV light, extreme temperatures, fungi, oxidation and ozone.

The V2800 series is specially designed to provide the following features:

- Stress distribution reduces pressure points, thereby minimizing distortion
- High-performance, durable acrylic adhesive provides a strong, long-lasting bond
- Conformable, closed-cell polyurethane foam has excellent environmental resistance
- Prevents corrosion of dissimilar materials by eliminating the contact between them
- Standard polyethylene liner excels in automated production



Available Sizes

Standard thickness: 0.8, 1.14, 1.6, 2.4 and 3.2mm

Master roll size: 56 in. (1422 mm) width.

Slit rolls also available. Standard roll length varies with thickness.

Nonstandard roll length available on special order.

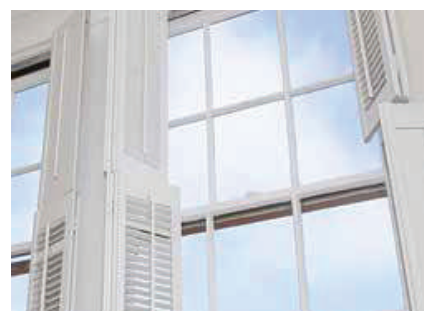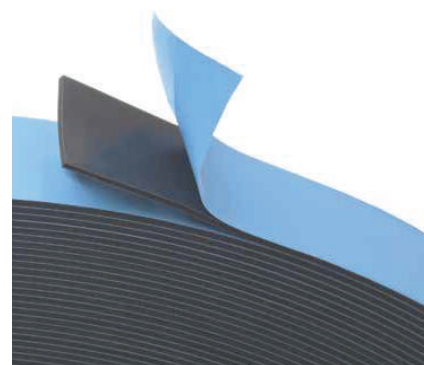

Applications

- Window muntin bars
- Emblems and ornamentation
- Trailer roof bows
- Panel stiffeners
- Signs and nameplates
- Weather stripping
- Body side molding
- Composite panels



FOAM Sealant Pty Ltd

SYDNEY | MELBOURNE | BRISBANE | PERTH

E sales@foamsealant.com.au | P 1300 000 205 | W foamsealant.com.au

ACN 068 983 755 ABN 83 197 550 989 Copyright © Foam Sealant 2021



Norbond V2800 Series — Properties

Performance tests are run using standard test procedures. The values presented are typical values and should not be used for specification purposes.

Property	Test Method	Value or Rating
Density: lbs/ft ³ (kg/m ³)	ASTM D-1667	30 (480)
Peel Adhesion: oz/in (N/m) 180° Peel 15-min. dwell	PSTC-3	108 (1,181)
Dynamic Shear Adhesion: psi (kPa), 72 hr. dwell stainless steel to paint	NTP-5	120 (827)
Dynamic Tensile Adhesion: psi (kPa) 24 hr. dwell aluminum to paint	NTP-11	100 (689)
Tensile Strength of Foam: psi (kPa)	ASTM D-412 DIE C	130 (896)
Elongation of Foam: %	ASTM D-412 DIE C	275
Water Absorption: % by weight	NTP-36	5

NTP- Norton Test Procedure

Options (subject to minimum order requirements)

Liner: Powder-blue polyethylene liner is standard. Other liners may be available with minimum order requirement.

Important Instructions

- Because **Saint-Gobain** cannot anticipate or control every potential application, we strongly recommend testing of this product under individual application conditions prior to commercial use.
- Surfaces must be clean and free of oil, grease, moisture, dust and dirt. Isopropyl alcohol is good for cleaning the surface.
- Apply a uniform pressure of 15 psi (103 kPa) to promote good contact between the material to be bonded and the tape. The application temperature should be between 60°F and 125°F (16°C to 52°C). It is not recommended to apply these tapes at temperatures below 60°F (16°C), as the adhesive does not flow in this condition and can result in poor bonding.
- Recommended Service Temperature is between -40°F to 200°F (-40°C to 93°C).
- The adhesion between the substrate and the tape increases with time, typically reaching final bond strength in 72 hours. Heating the product above 105°F (40°C) will accelerate the adhesion process.

Shelf Life

12 months after the date of sale when stored in original packaging at temperatures up to 70°F (21°C) and 50% relative humidity.



Need more adhesion? Stick with Saint-Gobain Norbond Adhesion Promoters.

Norbond Adhesion Promoters improve bonding on substrates that resist adhesion. It can be used to develop an immediate quick-stick and generally improves pressure-sensitive acrylic adhesive systems (such as those used on **Norbond** Tapes). This enhances adhesion to irregular and curved surfaces. Various formulations are available for specific substrates.

Norbond V2800 — Standard Roll Sizes

Product No.	Thickness in. (mm)	Length ft. (m)
V2830	.030 (.8)	200 (61)
V2845	.45 (1.2)	200 (61)
V2862	.062 (1.5)	200 (61)
V2890	.090 (2.3)	150 (45)
V28120	.120 (3.0)	50 (15)

3" I.D. cardboard cores standard